

# Keysight Technologies

## RP7900 Series Regenerative Power System

Data Sheet



- RP7951A (5 kW, 200/208 VAC)
- RP7952A (10 kW, 200/208 VAC)
- RP7953A (10 kW, 200/208 VAC)
- RP7961A (5 kW, 400/480 VAC)
- RP7962A (10 kW, 400/480 VAC)
- RP7963A (10 kW, 400/480 VAC)

## Introduction

In the global marketplace, how do you gain a competitive advantage? Many manufacturers are trying to meet production ramps, quality goals and reduce the cost of test as a means of differentiation. Often the primary concern is the costs of equipment, calibration, and maintenance. Although initial capital investments always command our attention, operating expenses can play an even more critical role in total cost of ownership. Managing total cost of ownership can provide a competitive advantage for your business.

As the demand for high power grows, for example shift in automotive from 12V battery to over 300V for HEV/EV, it drives the need for higher power test equipment. Testing at high-power is not a simple extension of low power. As you move into high power applications in aerospace defense, infrastructure and automotive, it presents unique challenges that were not relevant in low power applications. Companies now must consider site preparation necessities, and safety requirements when transitioning from low power to high power. Having a commercial off-the-shelf solution that has low cost of ownership would minimize your high-power test costs by reducing floor space usage, minimize heat dissipation, and maintain uptime. Keysight can help with the RP7900 Series regenerative power system.

## Our Solution

The Keysight RP7900 Series regenerative power system is a family of bi-directional, regenerative DC power supplies with highly integrated safety features that protect both your people and your device under test. The regenerative capability enables the energy normally consumed to be returned to the grid cleanly, saving costs associated with energy consumption and cooling.

In addition, by combining the seamless source and load functionality into a compact 3U-high package, not only do you save energy but also floor space and integration time. The RP7900 delivers the fastest, most accurate, integrated regenerative power system:

- Up to 950V, up to  $\pm 40A$ , up to 10kW
- Operate in two-quadrant mode as power source and regenerative electronic load
- Emulate high-voltage, high-power battery with programmable resistance up to 50  $\Omega$
- Maximize throughput with fast output speed and sub-millisecond command-processing time
- Create up to 150 kW power or loading through easy parallel connection
- Reduce cost for cooling and electricity with eco-friendly, regenerative design
- Save valuable rack space with compact 3U-high size
- A part of the EV1003A HEV/EV Power Converter Test Solution


The RP7900 is a part of Keysight's HEV/EV Power Converter Test Solutions that gives you confidence to deploy high-voltage, high-power solutions to meet the fast paced, high-growth demands of the Hybrid-Electric/Electric Vehicle (HEV/EV) market.



## Reduce costs for cooling and electricity with an eco-friendly regenerative design

The regenerative capability of the RP7900 enables the energy consumed to be put back onto the grid cleanly, saving costs from energy consumption and cooling, while not interfering with the grid. When the RP7900 is sinking current either from rapid down-programming of the output or from discharging an energy source like a battery, it will automatically return the excess power back to the grid. The regenerative operation is automatic so no programming is required. To safeguard your device under test, the RP7900 provides “anti-islanding” that senses that the grid is live before regenerating power back to the grid.

With efficiency of > 85%, the RP7900 helps you reduce energy consumption with less electricity usage when sourcing or sinking and less heat dissipation (which means less air conditioning) when sinking. Additionally, it provides clean regenerative operation by keeping the total harmonic distortion to a minimum of 2% (typical) at full load to minimize interference with other electronics.



## Continuously source and sink current

The RP7900 can continuously sink up to 100% of its rated current for an indefinite time. The two-quadrant, bidirectional sourcing and sinking capability of the DC power supply allows for seamless, uninterrupted transitions between sourcing and sinking current without changing the power supply's output characteristics or introducing any disruptive behavior.


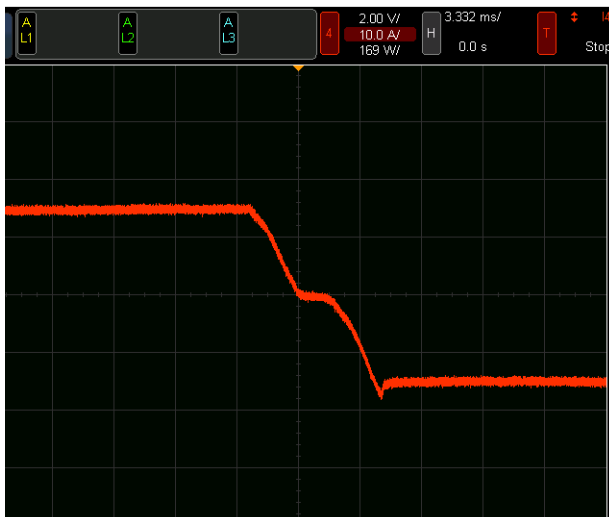


Figure 1. Seamless transition from sourcing current to sinking current



### Autoranging output – does the job of multiple power supplies

The RP7900 power supplies' autoranging output characteristic makes it much more flexible than rectangular, or traditional, output characteristic power supplies because they expand the power curve, giving the user more voltage and current combinations in one power supply. Power supplies with rectangular output characteristics provide full power at only one voltage and current combination. The RP7900 is like having many rectangular power supplies in one.

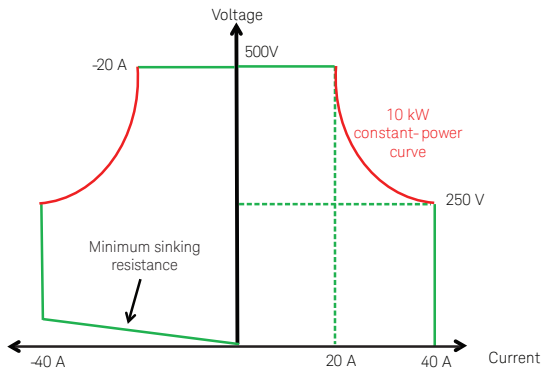


Figure 2. Autoranging output characteristic of the 10kW RP7952A


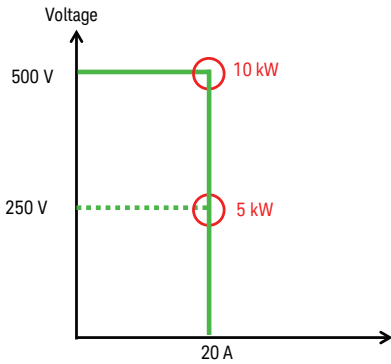


Figure 3. Rectangular output characteristic of a traditional 10kW supply




### Emulate high-voltage, high-power battery

With their battery emulation feature, the RP7900 allows you to test your devices under the same power conditions that exist in actual use. Emulating the battery is key when characterizing battery operating life and detecting early product failures. Through programmable resistance up to 50 Ω (model dependent), these DC sources simulate the effects of internal resistance of the battery, enabling them to emulate the operation of batteries in different charge states. Use the bidirectional RP7900 as a power source or an electronic load, just like a battery



## Accelerate test throughput with industry-leading specifications

Shaving seconds or even milliseconds off a test time can lead to significant savings for high-volume manufacturers, making throughput gains a never-ending quest for test system designers. The RP7900 is a valuable tool for increasing throughput. It provides fast output speed (1ms), sub-millisecond command-processing time ( $\leq 1$  ms), and output list that can help you achieve significant throughput gains in your testing.



## Accurately characterize your DUT's power profile with advanced measurements


The RP7900 provides simultaneous voltage and current measurement capabilities that deliver high accuracy and resolution. Make measurements using two main modes: averaged or digitized. In average mode, the RP7900 delivers high accuracy voltage and current measurements. The digitizing capability allows you to capture dynamic current or voltage profiles.

In addition to high-accuracy voltage and current measurement capabilities, the RP7900 Series regenerative power system offer built-in power, peak power, amp-hour, and watt-hour calculations. These measurements help simplify your power efficiency and storage calculations.



## Avoid damage to your DUT

When you are testing costly DUTs, integrating power protection measures into the test system is critical. Using instrumentation with built-in or integrated protection features provides a huge benefit when DUT protection is required. With protection measures implemented in hardware rather than test system software, error conditions can be detected and handled much faster, reducing the likelihood of the DUT sustaining major damage. The RP7900 provides built-in over-voltage, over-current, and over-temperature protection. For even greater DUT protection, use the accessory SD1000A Safety Disconnect System that was exclusively designed to work with the RP7900 Series to handle faults and ensure the output is secured with a redundant safety disconnect system.



## Generate voltage and current transients

SDUTs that are operated in rugged environments, such as automotive electronics and avionics, can often experience transient behavior from the power source, such as voltage dropouts or surges. To ensure your DUT can stand up to these real-world transients, you must simulate worst-case power transient conditions in the test process. The RP7900 provide three different functionalities for simulating either voltage or current transients for testing:

**Step:** One-time event that steps the output voltage or current up or down in response to a triggered event.

**Arbitrary waveforms:** An arbitrary waveform generator (arb) allows you to generate complex user-defined voltage or current waveforms of up to 65,535 data points.

**List:** A list can consist of up to 512 steps. Each step in the list can have a unique dwell time associated with it, which specifies the time in seconds that the list will remain at that step before moving on to the next step. Lists can also be trigger-paced, in which case the list advances one step for each trigger received.



## Properly powering on and off your DUT

If you work with DUTs that have multiple power supply inputs, you often need to properly sequence on or off each power supply at strictly repeatable times to prevent current surges and latch-up conditions. In addition to sequencing on or off each supply, you may need to set the ramp rate of each supply at turn-on or turn-off to a particular rate. These requirements add significant complexity to an ATE test system, both in hardware and software. The RP7900 provides built-in sequencing capability across RP7900 supplies or with Keysight's popular N6700 modular system power supplies or N6900/N7900 Advanced Power System. Also, the RP7900 provide adjustable slew rate control at turn-on or turn-off. These built-in capabilities provide a clean low-complexity way to properly power-on or off your DUT during test.

## Add power flexibility to your test system by paralleling multiple supplies

Paralleling multiple power supplies together is a great way to add power flexibility to your test system. The down side of paralleling power supplies together is typically you cannot get all the supplies to operate in the desired constant voltage (CV) or constant current (CC) mode. For instance, when trying to operate in CV mode with two parallel supplies, one will typically source the bulk of the current and operate in CC mode and the other supply will source only a fraction of the current and operate in CV mode. This condition can highly degrade certain power supply performance specifications such as transient response. With the RP7900 you do not have to worry about this since it has built-in paralleling capability that ensures each supply equally shares the load current so they all remain in the desired mode, whether it is CV or CC.

The RP7900 can also be operated in master/slave mode which enables paralleled units to be configured and programmed to look like “one” big power supply of up to 150 kW of total power; no need to program each supply individually. The RP7900 Series regenerative power system gives you the flexibility to easily parallel up to 15 units (of identical voltage rating) for greater output current.



Figure 4. Parallel operation for more power

## Get lots of power in a small test-system footprint

Save valuable rack space with the RP7900 that provides up to 10 kW of sourcing and loading in a compact 3U high package.

## Simplify system connections

The RP7900 Series power supplies comes standard with GPIB, Ethernet/LAN, USB 2.0 giving you the flexibility to use your I/O interface of choice today and safeguard your test setup for the future. There is no need to worry whether you are choosing the right interface when they all come standard. The RP7900 is LXI Core 2011 compliant and includes a built-in Web interface. This means you can control the RP7900 remotely using a Web browser and a LAN connection.

## AC input

The RP7900 series includes six total models. Three have 200/208 VAC inputs and the remaining three have 400/480 VAC inputs. This gives the RP7900 the ability to be used anywhere in the world. Choose 200/208 VAC for regions such as the Americas and Japan or choose 400/480 VAC for regions such as Europe and Asia. The RP7900 uses 3-phase AC input.

## Digital control port

On the rear panel of every RP7900 power supply is a digital control port that consists of seven user configurable I/O pins that provide access to various control functions. Each pin is user configurable. Table 1 describes the possible pin configuration for the digital port functions.

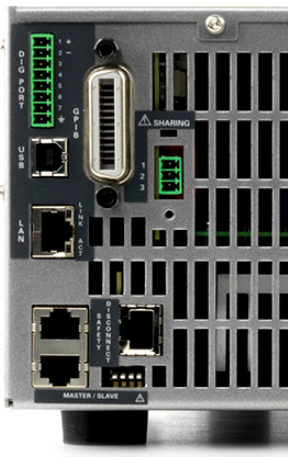


Figure 5. Digital control port on rear panel

Table 1. Digital control port description

Pin function	Available configurable pins
Digital I/O and digital in	Pins 1 through 7
External trigger in/out	Pins 1 through 7
Fault out	Pins 1 through 2
Inhibit in	Pins 3
Output couple	Pins 4 through 7
Common (connected to ground)	Pins 8

## RP7909A Rack mount kit

The RP7900 is easily rack-mounted using the RP7909A rack mount kit. This kit provides all the necessary hardware to rack mount a RP7900 in a 19-inch EIA rack cabinet. This rack mount kit includes slide rails, and flange mounts (without ears).

## SD1000A Safety Disconnect System

The SD1000A safety disconnect solution was designed to work exclusively with the RP7900 Series (500 V models only; contact Keysight for 950 V safety). In less than 15 ms the safety disconnect will remove the output voltage in order to safeguard your device under test and your people in response to a fault. Faults can be generated by the RP7900 or a user (emergency switch). It includes four disconnect point (relays) with two each on the positive and negative sides.





## Specifications

Unless otherwise noted, specifications are warranted over the ambient temperature range of 0 to 40°C after a 30-minute warm-up period. Specifications apply at the output terminals, with the sense terminals connected to the output terminals (local sensing).

For more detailed specifications refer to the RP7900 user's manual at:  
[www.keysight.com/find/RPS-doc](http://www.keysight.com/find/RPS-doc)

	RP7951A/ RP7961A	RP7952A/ RP7962A	RP7953A/ RP7963A
<b>DC Ratings</b>			
Voltage source:	0 to 500 V	0 to 500 V	0 to 950 V
Current source and sink:	0 to ±20 A	0 to ±40 A	0 to ±20 A
Power:	5 kW	10 kW	10 kW
<b>Output ripple &amp; noise<sup>1</sup></b>			
CV peak-to-peak:	500 mV	500 mV	1000 mV
CV rms:	100 mV	100 mV	200 mV
<b>Load regulation</b>			
Voltage:	30 mV	30 mV	60 mV
Current:	9 mA	17 mA	9 mA
<b>Voltage programming accuracy<sup>2</sup></b>			
Voltage programming accuracy <sup>2</sup>	0.03% + 60 mV	0.03% + 60 mV	0.03% + 120 mV
<b>Voltage measurement accuracy<sup>2</sup></b>			
Voltage measurement accuracy <sup>2</sup>	0.03% + 80 mV	0.03% + 80 mV	0.03% + 160 mV
<b>Current programming and measurement accuracy<sup>2</sup></b>			
Current programming and measurement accuracy <sup>2</sup>	0.1% + 12 mA	0.1% + 24 mA	0.1% + 12 mA
<b>Transient response<sup>3</sup></b>			
Recovery Time:	500 μs	500 μs	500 μs
Settling band:	1.25 V	1.25 V	2.375 V

1. From 20 Hz to 20 MHz with resistive load, terminals ungrounded, or either terminal grounded
2. At 25°C ±5°C after a 30 minute warm-up; measurement NPLC=1; valid for 1 year
3. Time to recover to within the settling band following a step change from 50% to 100% of full load

## Supplemental Characteristics

Supplemental characteristics are not warranted but are descriptions of performance determined either by design or by type testing. Supplemental characteristics are typical unless otherwise noted.


	RP7951A/ RP7961A	RP7952A/ RP7962A	RP7953A/ RP7963A
<b>Output ripple and noise<sup>1</sup></b>			
CC rms:	100 mA	200 mA	100 mA
<b>Resistance programming</b>			
Range:	0 to 25 $\Omega$	0 to 12.5 $\Omega$	0 to 50 $\Omega$
Resolution:	140 $\mu\Omega$	70 $\mu\Omega$	280 $\mu\Omega$
Accuracy <sup>2</sup> :	0.08% + 200 $\mu\Omega$	0.08% + 110 $\mu\Omega$	0.08% + 280 $\mu\Omega$
<b>Voltage rise time (High bandwidth)<sup>3</sup></b>			
10% to 90% step value:	1 ms	1 ms	1 ms
Settling time <sup>5</sup> :	6 ms	6 ms	6 ms
<b>Voltage rise time (Low bandwidth)<sup>3</sup></b>			
10% to 90% step value:	15 ms	15 ms	15 ms
Settling time <sup>5</sup> :	50 ms	50 ms	50 ms
<b>Voltage fall time (High bandwidth)<sup>4</sup></b>			
90% to 10% step value:	1 ms	1 ms	1 ms
Settling time <sup>5</sup> :	6 ms	6 ms	6 ms
<b>Voltage fall time (Low bandwidth)<sup>4</sup></b>			
90% to 10% step value:	15 ms	15 ms	15 ms
Settling time <sup>5</sup> :	50 ms	50 ms	50 ms
<b>Current rise time<sup>2</sup></b>			
10% to 90% step value	2 ms	2 ms	2 ms

1. From 20 Hz to 20 MHz with resistive load, terminals ungrounded, or either terminal grounded
2. At 25°C  $\pm$ 5°C after a 30 minute warm-up; measurement NPLC=1; valid for 1 year
3. With full resistive load and a step change from 0.1% to 100% of rated output
4. With no load and a step change from 100% to 0.1% of rated output
5. From start of voltage change to within 0.1% of final step value

## Common Characteristics


Common Characteristic	All Models
Command Processing Time	$\leq 1$ ms from receipt of command to start of output change
<b>Computer Interfaces</b>	
LXI:	LXI Core 2011 compliant 10 Mb, 100 Mb, 1 Gb LAN
LAN:	10 Mb, 100 Mb, 1 Gb LAN
USB:	USB 2.0 (USB-TMC488 protocol)
GPIB:	SCPI - 1993, IEEE 488.2 compliant interface
<b>Constant Dwell ARBs</b>	
Number of points:	Up to 65,535
Dwell range:	One dwell setting applies for the entire ARB, from 10.24 $\mu$ s to 0.30 seconds
Dwell resolution:	Values are rounded to the nearest 10.24-microsecond increment
<b>Regulatory Compliance</b>	
EMC:	Complies with European EMC Directive for test and measurement products Complies with Australian standard and carries C-Tick mark This ISM device complies with Canadian ICES-001 Cet appareil ISM est conforme à la norme NMB-001 du Canada
Safety:	Complies with European Low Voltage Directive and carries the CE mark. Conforms to US and Canadian safety regulations.
<b>Output Terminal Isolation:</b>	No output terminal may be more than $\pm 950$ VDC from any other terminal or chassis ground.
<b>AC Input</b>	
Phase and range:	3 phase; 200–208 VAC input, $\pm 10\%$ (RP7951A - 53A) 3 phase; 400–480 VAC input, $\pm 10\%$ (RP7961A - 63A)
<b>Efficiency at full power:</b>	RP7951A/RP7961A/RP7953A: 88% RP7952A/RP7962A/RP7963A: 91.5%
<b>Power Factor:</b>	0.99 @ nominal input and rated power
<b>Typical Weight</b>	RP7951A/RP7961A: 60 lbs. (27.3 kg) RP7952A/RP7962A/RP7953A/RP7963A: 70 lbs. (31.8 kg)

## Output Quadrants

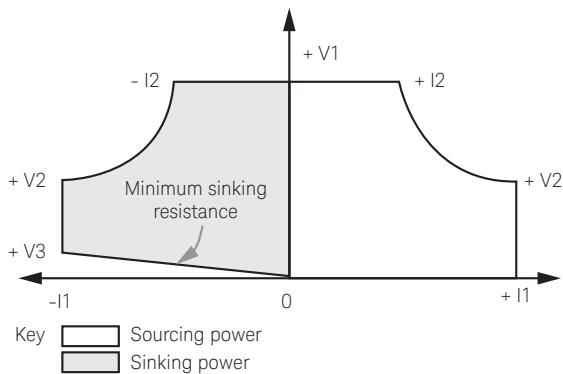

Model	+ V1	+ V2	+ V3	+/- I1	+/- I2	Minimum sink resistance
RP7951A/RP7961A	500 V	250 V	8 V	20 A	10 A	0.4 $\Omega$
RP7952A/RP7962A	500 V	250 V	8 V	40 A	20 A	0.2 $\Omega$
RP7953A/RP7963A	950 V	475 V	16 V	20 A	10 A	0.8 $\Omega$

## Outline Diagrams

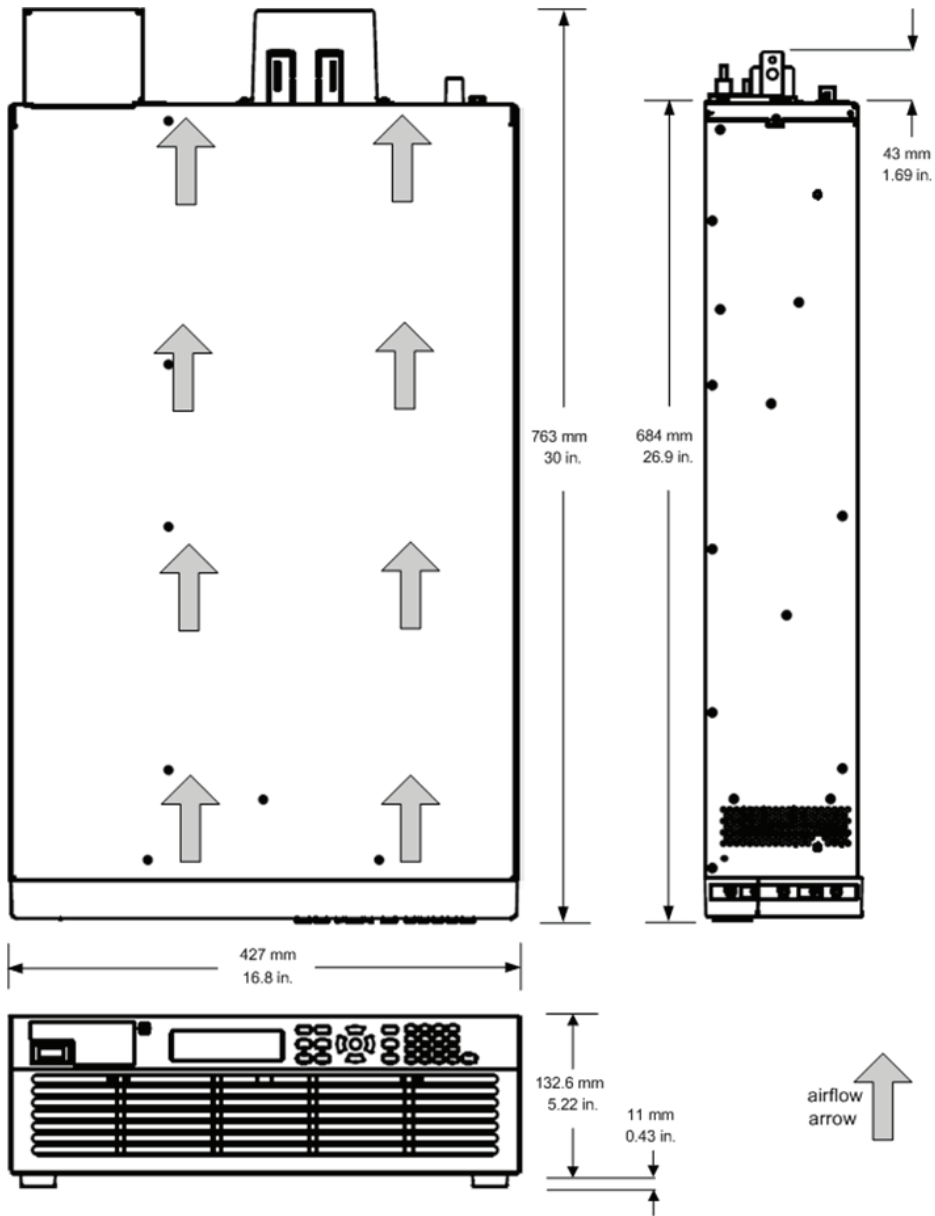

## Ordering Information

### Available models

200/208 VAC Models		
RP7951A	Regenerative Power System	500 V, $\pm 20$ A, 5 kW
RP7952A	Regenerative Power System	500 V, $\pm 40$ A, 10 kW
RP7953A	Regenerative Power System	950 V, $\pm 20$ A, 10 kW
400/480 VAC Models		
RP7961A	Regenerative Power System	500 V, $\pm 20$ A, 5 kW
RP7962A	Regenerative Power System	500 V, $\pm 40$ A, 10 kW
RP7963A	Regenerative Power System	950 V, $\pm 20$ A, 10 kW

### AC input voltages

If the AC input voltage where the power supply will be used is:

- 180 to 229, please choose a 200/208 VAC model (RP7951A - RP7953A)
- 360 to 528, please choose a 400/480 VAC model (RP7961A - RP7963A)

### Line cords and terminations (plugs)

Due to the number of different line cords and terminations around the world, the RP7900 power supplies do not come with line cords or terminations. Users will need to supply their own dependent on the local laws and codes of the country/region where the power supply will be used.

### Option

**Option UK6** Commercial calibration with test results data

### Accessories


**RP7909A** Rack Mount Kit for RP7900 Regenerative Power System

**SD1000A** Safety Disconnect System (for 500 V models only)

## Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

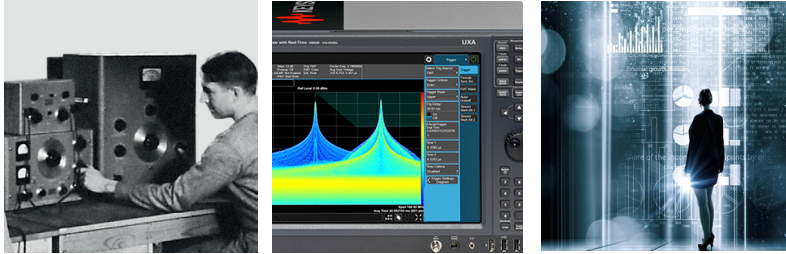

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at:

[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

### Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

### Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:

[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
(BP-9-7-17)

**DEKRA Certified**  
ISO 9001 Quality Management System

[www.keysight.com/go/quality](http://www.keysight.com/go/quality)  
Keysight Technologies, Inc.  
DEKRA Certified ISO 9001:2015  
Quality Management System

### myKeysight

#### myKeysight

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.

[http://www.keysight.com/find/emt\\_product\\_registration](http://www.keysight.com/find/emt_product_registration)

Register your products to get up-to-date product information and find warranty information.

### KEYSIGHT SERVICES

Accelerate Technology Adoption.  
Lower costs.

#### Keysight Services

[www.keysight.com/find/service](http://www.keysight.com/find/service)

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



#### Keysight Assurance Plans

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

#### Keysight Channel Partners

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

[www.keysight.com/find/RP7900](http://www.keysight.com/find/RP7900)



Unlocking Measurement Insights

This information is subject to change without notice.  
© Keysight Technologies, 2017  
Published in USA, December 1, 2017  
5992-2335EN  
[www.keysight.com](http://www.keysight.com)