



MSP510 Passive Probe User Guide

Assembly

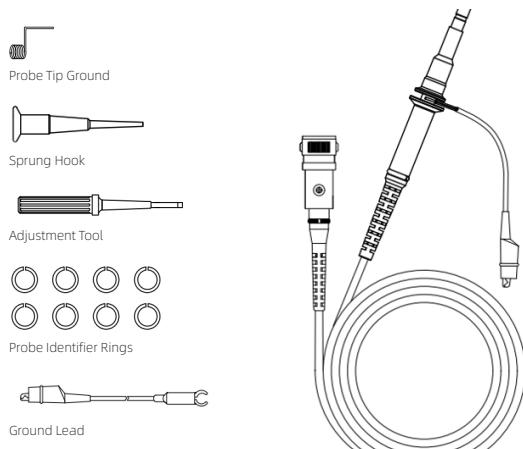

Calibration

Before using the probe for testing, please check the compensation of the probe first and adjust it to match the channel inputs. Most oscilloscopes have a square wave reference signal available at a terminal on the front panel used to compensate the probe. Connect the probe to the signal source to display a 1 kHz test signal on your oscilloscope.

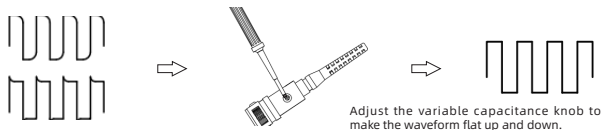

*Note: When the probe is connected to a different channel, it needs to be recalibrated. Each channel only needs to be calibrated once.




Specifications

Unless otherwise specified, all specifications are typical values and valid under the following conditions:

- Oscilloscope must have an input impedance of $1M\Omega$ and warm up for 20 minutes at least.
- The probe has been calibrated properly.
- The temperature and humidity must not exceed the specified requirements.

Model	MSP510
Bandwidth	500MHz
Rise Time	$\leq 800ps$
Attenuation	1:10
Input Resistance	$10M\Omega$
Input Capacitance	$10.5pF \pm 0.5pF$
Adjustable Capacitor Range	4~24pF
Max. Working Input Voltage	< 600Vpk
Net Weight	< 53g
Length	$132cm \pm 1.5cm$
Working Temperature	$-10^{\circ}C \sim +50^{\circ}C$
Working Humidity	< 85% (Relative)

Amplitude-Frequency characteristics curve

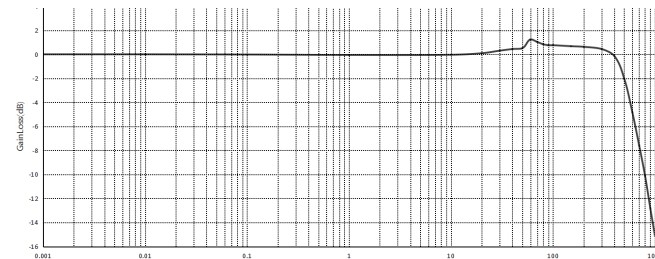

Micsig Shenzhen Micsig Technology Co., Ltd.

Tel: +86-755-88600880 Email: sales@micsig.com Web: www.micsig.com
Add: 6F, Jinhuan Building, No. 56, Tiezai Rd, Bao'an District, Shenzhen, Guangdong, China.