


Keysight Technologies

GSM/EDGE/Evo

X-Series Measurement App, Multi-Touch UI N9071EM0E

Technical Overview

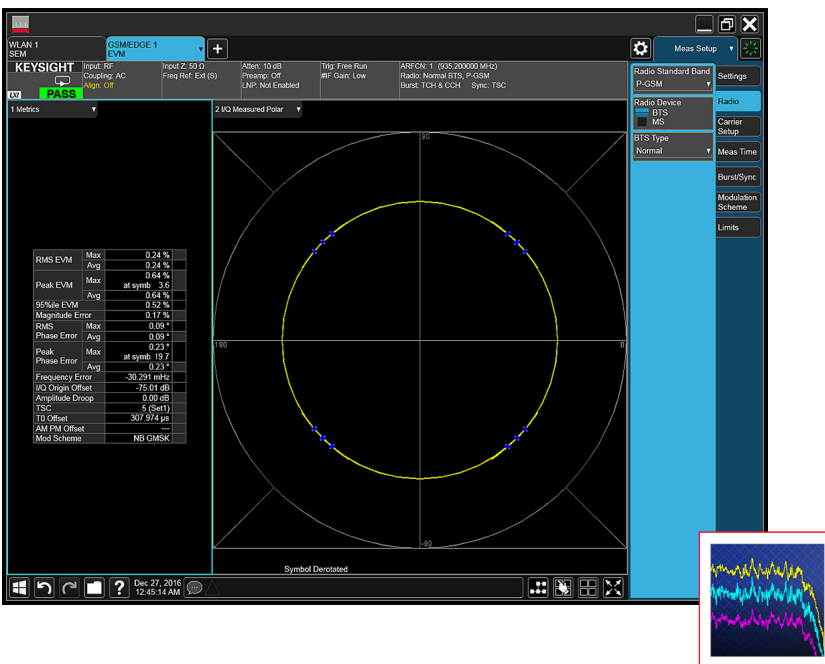

- Measure GSM, EDGE, and EDGE Evolution RF transmitter performance, including multi-carrier base transceiver stations (MC-BTS)
- Test voice services over adaptive multi-user channels on one slot (VAMOS) enabled transmitters
- Perform one-button transmitter tests with pass/fail limit per 3GPP standard
- Use hardkey/softkey manual user interface or SCPI remote user interface
- Leverage built-in, context-sensitive help
- Flexible licensing provides the option of using perpetual or time based licenses with one or multiple signal analyzers

GSM/EDGE/Evo Measurement Application

The GSM/EDGE/Evo measurement application transforms the X-Series signal analyzers into standards-based GSM, EDGE, and EDGE-Evolution transmitter testers by adding fast one-button RF conformance measurements to help you design, evaluate, and manufacture your GSM/EDGE devices. The measurement application is further enhanced to support multicarrier (MC) BTS and voice services over adaptive multi-user channels on one slot (VAMOS)—allowing you to stay on the leading edge of your design and manufacturing challenges.

X-Series measurement applications

X-Series measurement applications increase the capability and functionality of Keysight Technologies, Inc. signal analyzers to speed time to insight. They provide essential measurements for specific tasks in general-purpose, cellular communications, wireless connectivity applications, covering established standards or modulation types. Applications are supported on both benchtop and modular, with the only difference being the level of performance achieved by the hardware you select.

X-Series measurement applications can help you:

- Gain more insight into device performance with intuitive display and graphs for your application. Select from our library of over 25 different measurement applications.
- Ensure that your design meets the latest standard. Updates are made to the X-Series measurement applications as standards Evolve.
- Apply the same measurement science across multiple hardware platforms for consistent measurement results over your design cycle from R&D to production.
- Choose the license structure that meets your business needs. We provide a range of license types (node-locked, transportable, floating or USB portable) and license terms (perpetual or time-based).

Download your next insight

Keysight software is downloadable expertise. From first simulation through first customer shipment, we deliver the tools your team needs to accelerate from data to information to actionable insight.

- Electronic design automation (EDA) software
- Application software
- Programming environments
- Productivity software



Learn more at

www.keysight.com/find/software

Start with a 30-day free trial.

www.keysight.com/find/free_trials



Top Features

With the X-Series signal analyzers and the GSM/EDGE/Evo measurement application, you can perform RF transmitter measurements on BTS and mobile devices in time, frequency, and modulation domains. Measure basic GSM and EDGE signals as well as EDGE/Evo signals with Level A (normal burst) and Level B (high symbol rate) with all modulation formats and transmit filters. In addition, MC-BTS and VAMOS transmitter measurements according to Release 9 of the 3GPP standard is supported.

For mobile station (MS) high-speed manufacturing, a single acquisition combined GSM/EDGE measurement is available where the speed is up to 20 times faster than traditional one-button measurements (for details refer to Ordering Information).

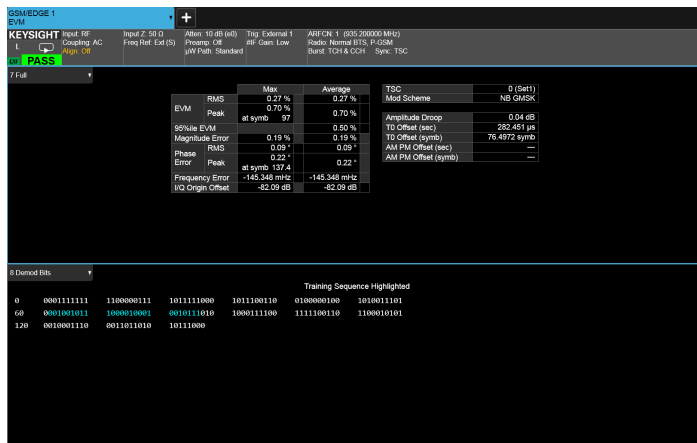


Figure 1. EVM and demodulated bits for GMSK modulation signals. Training sequences are highlighted.

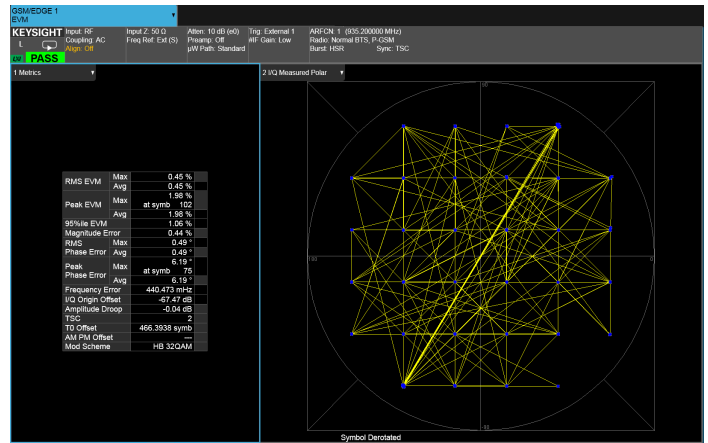


Figure 2. Constellation diagram and error summary of an HSR 32QAM EDGE Evolution signal.

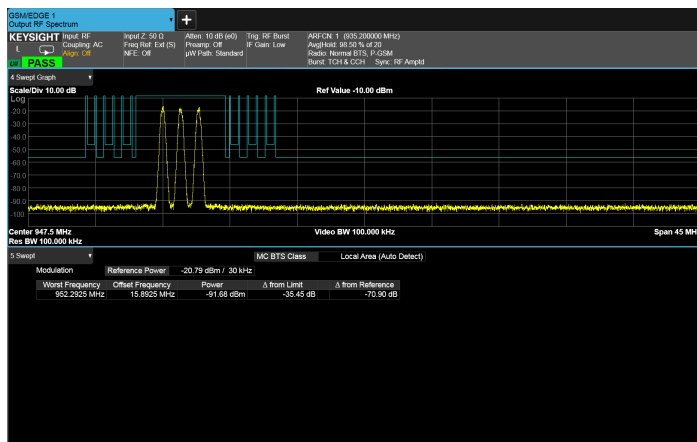


Figure 3. Multi-carrier BTS (MC-BTS) ORFS with limit mask for ORFS and up to 5th order intermodulation products. MC-BTS ORFS can also be configured for non-contiguous frequency allocation.

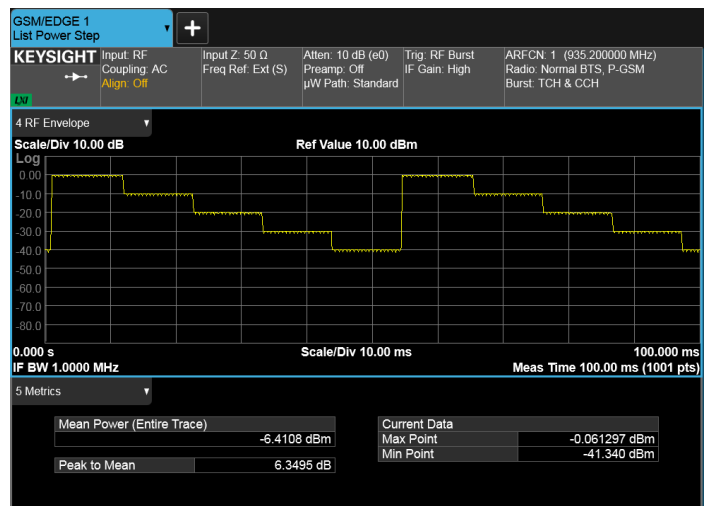


Figure 4. GSM list power step measurement.

Measurement Summary

Standards-based RF transmitter test

The RF transmitter test requirements for GSM/EDGE/EDGE Evolution are defined in TS 45 and 51 series of the 3GPP standard. Table 2 shows the required base station RF transmitter tests along with the corresponding measurement applications.

Table 1. Required BTS RF transmitter measurements and the corresponding measurements in N9071EM0E and 89600 VSA software

| 3GPP TS.51.021 subclause | Transmitter test | N9071EM0E X-Series measurement application | 89600 VSA software Option AYA |
|--------------------------|---|---|--|
| 6.2 | Modulation accuracy | EVM | EVM |
| 6.3 | Mean transmitted RF carrier power | Transmit power | Can be performed using band power marker |
| 6.4 | Transmitted RF carrier power versus time | Power vs. time | |
| 6.5.1 | Spectrum due to modulation and wideband noise | Output RF spectrum (ORFS) due to modulation and wideband noise | |
| 6.5.2 | Switching transients spectrum | Output RF spectrum (ORFS) due to switching | |
| 6.6.1 | Conducted spurious emissions from the transmitter antenna connector, inside the BTS transmit band | Tx band spur | |
| 6.6.2 | | Spectrum analyzer mode – Spurious emissions | |
| 6.7 | Intermodulation attenuation | Spectrum analyzer mode – Spurious emissions | |
| 6.8 | Intra base station system intermodulation attenuation | Spectrum analyzer mode – Spurious emissions | 89600 VSA offers modulation quality measurements. For one button, non-demodulation, measurements such as ORFS and PVT, use the N9071EM0E embedded application. |
| 6.9 | Intra base station system intermodulation attenuation, MXM 850 and MXM 1900 | Spectrum analyzer mode – Spurious emissions | |
| 6.10 | Intra base station system intermodulation attenuation, PCS 1900, GSM 850, GSM 700 | Spectrum analyzer mode – Spurious emissions | |
| 6.11 | Intermodulation attenuation (GSM 700, GSM 850, MXM 850, PCS 1900, and MXM 1900) | Spectrum analyzer mode – Spurious emissions | |
| 6.12 | Wideband noise and intra-BSS intermodulation attenuation in multicarrier operation | MCBTS ORFS due to modulation and wideband noise. Available for both contiguous and non-contiguous frequency allocation. | |

Measurement Details

Table 2. One-button measurements provided by the N9071EM0E measurement application

| Technology | GSM/EDGE | EDGE Evolution Level A (EGPRS2-A) Level B (EGPRS2-B) | VAMOS (AQPSK) | Single Carrier BTS | MC BTS Single Carrier active | MC BTS Multicarrier active for contiguous and non-contiguous frequency allocation | MS |
|--------------------------------------|----------|--|---------------|--------------------|------------------------------|---|-----|
| Measurements | | | | | | | |
| EVM | ● | ● | ● | ● | ● | ○ | ● |
| RMS EVM | ● | ● | ● | ● | ● | ○ | ● |
| Peak EVM | ● | ● | ● | ● | ● | ○ | ● |
| 95% EVM | ● | ● | ● | ● | ● | ○ | ● |
| Frequency error | ● | ● | ● | ● | ● | ○ | ● |
| Phase error | ● | ● | ● | ● | ● | ○ | ● |
| Magnitude error | ● | ● | ● | ● | ● | ○ | ● |
| I/Q origin offset | ● | ● | ● | ● | ● | ○ | ● |
| TO offset | ● | ● | ● | ● | ● | ○ | ● |
| AM PM offset | ● | ● | ● | ● | ● | ○ | ● |
| Transmit power | ● | ● | ● | ● | ● | ○ | ● |
| Power vs. time | ● | ● | ● | ● | ● | ○ | ● |
| Output RF spectrum | | | | | | | |
| Due to modulation and wideband noise | ● | ● | ● | ● | ● | ● | ● |
| Due to switching transients | ● | ● | ● | ● | ● | ● | ● |
| In-band Tx band spur | ● | ● | ● | ● | (*1) | (*2) | n/a |

Notes: ○ Supported, but focused on one carrier measurement at a time
 (*1) Use output RF spectrum in single carrier operation
 (*2) Use output RF spectrum in multicarrier operation

Single acquisition combined measurements

The N9071EMxE single acquisition combined GSM/EDGE measurement application is for high-speed manufacturing of GSM/EDGE mobile phone transmitters, wireless components, such as power amplifiers, and low-cost pico/femtocell base stations. Used with X-Series multi-touch signal analyzers MXA N9020B and EXA N9010B, it provides up to 20 times speed improvement compared to traditional one-button measurements for list power step, phase and frequency error (PFER), EDGE EVM, PVT, ORFS, marker measurements, and harmonics.

Single Acquisition

Contains one continuous block of captured data collected using predefined capture settings. The capture period can be defined by test engineers to suit the requirements for specific device tests, for example, the number of GSM bursts required to provide the engineer with enough data to ensure a good measurement on the DUT.

Combined Measurements

Implies that the measurement sequence performed by the analyzer can accommodate any mix of transmitter power measurements and modulation quality measurements performed on the data collected within the capture period.

Key Specifications

Definitions

- Specifications describe the performance of parameters covered by the product warranty.
- 95th percentile values indicate the breadth of the population ($\approx 2\sigma$) of performance tolerances expected to be met in 95% of cases with a 95% confidence. These values are not covered by the product warranty.
- Typical values are designated with the abbreviation "typ." These are performance beyond specification that 80% of the units exhibit with a 95% confidence. These values are not covered by the product warranty.
- Nominal values are designated with the abbreviation "nom." These values indicate expected performance, or describe product performance that is useful in the application of the product, but is not covered by the product warranty.

Note: Data subject to change

Supported devices and standards

| Device type | BTS, MS |
|------------------|---|
| Standard version | Mobile station: 3GPP TS 51.010-1 v.10.0.0 (2012-03) Base station: 3GPP TS51.021 v.10.7.0 (2012-11) |
| BTS type | Normal, Micro1, Micro2, Micro3, Pico |
| Radio band | P-GSM 900, E-GSM 900, R-GSM 900, DCS1800, PCS1900, GSM 850, T-GSM 810, GSM 700, GSM 480, GSM 450 |

For a complete list of specifications refer to the appropriate specifications guide.

UXA: www.keysight.com/find/uxa_specifications PXIe:
 PXA: www.keysight.com/find/pxa_specifications VSA up to 6 GHz: www.keysight.com/find/m9391a
 MXA: www.keysight.com/find/mxa_specifications VSA up to 50GHz: www.keysight.com/find/m9393a
 EXA: www.keysight.com/find/exa_specifications
 CXA: www.keysight.com/find/cxa_specifications

Performance specifications

| Description | PXA | MXA | EXA | CXA ¹ |
|---|---------------------------|---------------------------|---------------------------|---------------------------|
| EDGE error vector magnitude (EVM)^{2, 3} | | | | |
| Carrier power range at RF input | +24 to -45 dBm (nom) | +24 to -45 dBm (nom) | +24 to -45 dBm (nom) | +24 to -45 dBm (nom) |
| EVM, rms | | | | |
| Operating range | 0 to 20% (nom) | 0 to 20% (nom) | 0 to 20% (nom) | 0 to 20% (nom) |
| Floor | 0.6 (0.4% nom) | 0.6 (0.5% nom) | 0.7 (0.5% nom) | 0.7 (0.5% nom) |
| Floor (Baseband IQ Input) | 0.5% (nom) | 0.5% (nom) | n/a | n/a |
| Accuracy conditions: | | | | |
| EVM range 1 to 10% (NSR 8 PSK); | ± 0.5% | ± 0.5% | ± 0.5% | ± 0.5% |
| EVM range 1 to 6% (NSR 16QAM/32QAM); | | | | |
| EVM range 1 to 8% (HSR QPSK); | | | | |
| EVM range 1 to 5% (HSR 16QAM/32QAM) | | | | |
| Frequency error | | | | |
| Initial frequency error range | ± 80 kHz (nom) | ± 80 kHz (nom) | ± 80 kHz (nom) | ± 80 kHz (nom) |
| Accuracy | ± 5 Hz + tfa ⁴ | ± 5 Hz + tfa ⁴ | ± 5 Hz + tfa ⁴ | ± 5 Hz + tfa ⁴ |

1. When the margin between this performance level and 3GPP requirements is not adequate, it may not test against the 3GPP test limits.
2. Specifications based on 200 bursts.
3. $3\pi/8$ shifted 8PSK, $3\pi/8$ shifted QPSK, $\pi/4$ shifted 16QAM, $-\pi/4$ shifted 32QAM modulation in NSR/HSR with pulse shaping filter
4. tfa = transmitter frequency x frequency reference accuracy

| Description | PXA | MXA | EXA | CXA |
|--|---------------------------|------------------------------------|------------------------------------|------------------------------------|
| IQ origin offset | | | | |
| DUT maximum offset | -15 dBc (nom) | -15 dBc (nom) | -15 dBc (nom) | -15 dBc (nom) |
| Maximum analyzer noise floor | -50 dBc (nom) | -50 dBc (nom) | -50 dBc (nom) | -50 dBc (nom) |
| Trigger to T0 time offset | | | | |
| Relative accuracy | ± 5.0 ns (nom) | ± 5.0 ns (nom) | ± 5.0 ns (nom) | ± 5.0 ns (nom) |
| Phase and frequency error (GMSK modulation)¹ | | | | |
| Carrier power range at RF input | +27 to -45 dBm (nom) | +27 to -45 dBm (nom) | +27 to -45 dBm (nom) | +27 to -45 dBm (nom) |
| Phase error, rms | | | | |
| Floor | 0.5° | 0.5° | 0.6° | 0.6° |
| Floor (baseband IQ input) | 0.3° (nom) | 0.3° (nom) | n/a | n/a |
| Accuracy | | | | |
| Phase error range 1° to 6° | ± 0.3° | ± 0.3° | ± 0.3° | ± 0.3° |
| Frequency error | | | | |
| Initial frequency error range | ± 80 kHz (nom) | ± 80 kHz (nom) | ± 80 kHz (nom) | ± 80 kHz (nom) |
| Accuracy | ± 5 Hz + tfa ² | ± 5 Hz + tfa ² | ± 5 Hz + tfa ² | ± 5 Hz + tfa ² |
| IQ origin offset | | | | |
| DUT maximum offset | -15 dBc (nom) | -15 dBc (nom) | -15 dBc (nom) | -15 dBc (nom) |
| Analyzer noise floor | -50 dBc (nom) | -50 dBc (nom) | -50 dBc (nom) | -50 dBc (nom) |
| Trigger to T0 time offset | | | | |
| Relative accuracy | ± 5.0 ns (nom) | ± 5.0 ns (nom) | ± 5.0 ns (nom) | ± 5.0 ns (nom) |
| Power vs. time (GSM/EDGE/EDGE Evolution) | | | | |
| Minimum carrier power at RF input | -35 dBm (nom) | -35 dBm (nom) | -35 dBm (nom) | -35 dBm (nom) |
| Absolute power accuracy for in-band signal (excluding mismatch error) | -0.11 ± 0.19 dB (95%) | -0.11 ± 0.23 dB (95%) | -0.11 ± 0.27 dB (95%) | -0.11 ± 0.60 dB (95%) |
| Power ramp relative accuracy (referenced to mean transmitted power) | | | | |
| Accuracy | ± 0.11 dB | ± 0.11 dB | ± 0.16 dB | ± 0.31 dB |
| Measurement floor | -95 dBm | -92 dBm | -89 dBm | -84 dBm |
| Output RF spectrum (ORFS) | | | | |
| Minimum carrier power at RF input | -20 dBm (nom) | -20 dBm (nom) | -20 dBm (nom) | -20 dBm (nom) |
| ORFS relative RF power uncertainty | | | | |
| Due to modulation | | | | |
| Offsets ≤ 1.2 MHz | ± 0.09 dB | ± 0.16 dB | ± 0.26 dB | ± 0.54 dB |
| Offsets ≥ 1.8 MHz | ± 0.11 dB | ± 0.18 dB | ± 0.27 dB | ± 0.95 dB |
| Due to switching | ± 0.09 dB (nom) | ± 0.12 dB (nom) | ± 0.17 dB (nom) | ± 0.36 dB (nom) |
| ORFS absolute RF power accuracy | ± 0.19 dB (95%) | ± 0.23 dB (95%) | ± 0.27 dB (95%) | ± 0.62 dB (95%) |
| GSM (GMSK): Dynamic range, spectrum due to modulation³ | | | | |
| Offset frequency | | | | |
| 100 kHz | 70.2 dB | 63.8 dB ⁴ | 63.7 dB ⁵ | 53.1 dB ⁶ |
| 200 kHz | 77.4 dB | 70.0 dB ⁴ | 69.5 dB ⁵ | 59.9 dB ⁶ |
| 250 kHz | 79.6 dB | 72.0 dB ⁴ | 71.4 dB ⁵ | 62.1 dB ⁶ |
| 400 kHz | 83.6 dB | 76.0 dB ⁴ | 75.0 dB ⁵ | 66.5 dB ⁶ |
| 600 kHz | 86.2 (87.4 dB typ) | 79.1 dB (80.8 dB typ) ⁴ | 77.6 dB (80.7 dB typ) ⁵ | 70.1 dB ⁶ (72.2 dB typ) |
| 1.2 MHz | 88.1 (90.3 dB typ) | 82.7 dB (85.0 dB typ) ⁴ | 80.7 dB (83.7 dB typ) ⁵ | 74.3 dB ⁶ (77.0 dB typ) |
| 1.8 MHz | 90.7 (91.9 dB nom) | 81.8 dB (83.2 dB nom) ⁴ | 81.3 dB (84.7 dB nom) ⁴ | 70.1 dB ⁶ (73.6 dB nom) |
| 6.0 MHz | 92.5 (94.5 dB nom) | 86.4 dB (88.5 dB nom) ⁴ | 84.1 dB (88.1 dB nom) ⁴ | 72.0 dB ⁶ (77.3 dB nom) |

1. Specifications based on 200 bursts.

2. tfa = transmitter frequency x frequency reference accuracy

3. 5-pole sync-tuned filters; methods: direct time and FFT

4. For MXA, phase noise optimization is set to Best Wide offset (offset > 100 kHz)

5. For EXA, phase noise optimization is set to Best Wide offset (offset > 100 kHz)

6. For CXA, phase noise optimization is set to Best Wide offset (offset > 100 kHz)

| Description | PXA | MXA | EXA | CXA |
|--|--------------------|------------------------------------|------------------------------------|------------------------------------|
| GSM (GMSK): Dynamic range, spectrum due to switching¹ | | | | |
| Offset frequency | | | | |
| 400 kHz | 80.7 dB | 73.7 dB ² | 72.5 dB ³ | 64.4 dB ⁵ |
| 600 kHz | 82.4 dB | 76.4 dB ² | 74.6 dB ³ | 67.6 dB ⁵ |
| 1.2 MHz | 83.5 dB | 79.1 dB ² | 76.6 dB ³ | 70.9 dB ⁵ |
| 1.8 MHz | 92.3 dB | 84.7 dB ² | 83.7 dB ³ | 71.6 dB ⁵ |
| EDGE (NSR 8PSK and narrow QPSK): Dynamic range, spectrum due to modulation⁴ | | | | |
| Offset frequency | | | | |
| 100 kHz | 70.2 dB | 63.8 dB ² | 63.9 dB ³ | 53.1 dB ⁵ |
| 200 kHz | 77.1 dB | 69.9 dB ² | 69.3 dB ³ | 59.8 dB ⁵ |
| 250 kHz | 79.1 dB | 71.8 dB ² | 71.0 dB ³ | 62.0 dB ⁵ |
| 400 kHz | 82.4 dB | 75.5 dB ² | 74.2 dB ³ | 66.2 dB ⁵ |
| 600 kHz | 84.2 (85.9 dB typ) | 78.2 dB (80.3 dB typ) ² | 76.4 dB (79.5 dB typ) ³ | 69.4 dB ⁵ (71.9 dB typ) |
| 1.2 MHz | 85.3 (87.7 dB typ) | 80.9 dB (83.7 dB typ) ² | 78.4 dB (81.5 dB typ) ³ | 72.7 dB ⁵ (76.2 dB typ) |
| 1.8 MHz | 88.8 (90.5 dB nom) | 81.3 dB (82.9 dB nom) ² | 80.3 dB (83.7 dB nom) ³ | 68.1 dB ⁵ (72.4 dB nom) |
| 6.0 MHz | 89.9 (92.3 dB nom) | 84.9 dB (87.5 dB nom) ² | 82.3 dB (86.2 dB nom) ³ | 69.2 dB ⁵ (74.8 dB nom) |
| EDGE (NSR 8PSK and narrow QPSK): Dynamic range, spectrum due to switching¹ | | | | |
| Offset frequency | | | | |
| 400 kHz | 80.7 dB | 73.7 dB ² | 72.5 dB ³ | 64.4 dB ⁵ |
| 600 kHz | 82.4 dB | 76.4 dB ² | 74.6 dB ³ | 67.6 dB ⁵ |
| 1.2 MHz | 83.5 dB | 79.1 dB ² | 76.6 dB ³ | 70.9 dB ⁵ |
| 1.8 MHz | 92.3 dB | 84.7 dB ² | 83.7 dB ³ | 71.6 dB ⁵ |
| EDGE (NSR 16/32QAM; HSR QPSK/16QAM/32QAM) Dynamic range, spectrum due to modulation⁴ | | | | |
| Offset frequency | | | | |
| 100 kHz | 70.0 dB | 63.7 dB ² | 63.5 dB ³ | 53.1 dB ⁵ |
| 200 kHz | 76.4 dB | 69.6 dB ² | 68.8 dB ³ | 59.7 dB ⁵ |
| 250 kHz | 78.1 dB | 71.4 dB ² | 70.3 dB ³ | 61.7 dB ⁵ |
| 400 kHz | 80.5 dB | 74.6 dB ² | 72.9 dB ³ | 65.5 dB ⁵ |
| 600 kHz | 81.5 (83.6 dB typ) | 76.6 dB (79.8 dB typ) ² | 74.3 dB (77.5 dB typ) ³ | 68.1 dB ⁵ (71.3 dB typ) |
| 1.2 MHz | 82.1 (84.6 dB typ) | 78.3 dB (82.1 dB typ) ² | 75.5 dB (78.7 dB typ) ³ | 70.3 dB ⁵ (74.4 dB typ) |
| 1.8 MHz | 86.2 (88.4 dB nom) | 80.1 dB (84.0 dB nom) ² | 78.6 dB (82.1 dB nom) ³ | 65.5 dB ⁵ (70.4 dB nom) |
| 6.0 MHz | 86.8 (89.4 dB nom) | 82.6 dB (86.7 dB nom) ² | 79.8 dB (83.6 dB nom) ³ | 66.0 dB ⁵ (71.8 dB nom) |
| EDGE (NSR 16/32QAM; HSR QPSK/16QAM/32QAM) Dynamic range, spectrum due to switching¹ | | | | |
| Offset frequency | | | | |
| 400 kHz | 79.7 dB | 73.3 dB ² | 71.8 dB ³ | 64.1 dB ⁵ |
| 600 kHz | 81.1 dB | 75.7 dB ² | 73.6 dB ³ | 67.0 dB ⁵ |
| 1.2 MHz | 81.9 dB | 77.8 dB ² | 75.1 dB ³ | 69.8 dB ⁵ |
| 1.8 MHz | 91.0 dB | 84.2 dB ² | 82.9 dB ³ | 70.3 dB ⁵ |

1. 5-pole sync-tuned filters
2. For MXA, phase noise optimization is set to Best Wide offset (offset > 100 kHz)
3. For EXA, phase noise optimization is set to Best Wide offset (offset > 100 kHz)
4. 5-pole sync-tuned filters; methods: direct time and FFT
5. For CXA, phase noise optimization is set to Best Wide offset (offset > 100 kHz)

Ordering Information

Flexible licensing and configuration

- **Perpetual:** License can be used in perpetuity.
- **Time-based:** License is time limited to a defined period, such as 12-months.
- **Node-locked:** Allows you to use the license on one specified instrument/computer.
- **Transportable:** Allows you to use the license on one instrument/computer at a time. This license may be transferred to another instrument/computer using Keysight's online tool.
- **Floating:** Allows you to access the license on networked instruments/computers from a server, one at a time. For concurrent access, multiple licenses may be purchased.
- **USB portable:** Allows you to move the license from one instrument/computer to another by end-user only with certified USB dongle, purchased separately.
- **Software support subscription:** Allows the license holder access to Keysight technical support and all software upgrades

GSM/EDGE/Evo measurement application (N9071EM0E)

| Model | Software License Type | Support Contract | Support Subscription (12-month) ² |
|---------------|-------------------------|--------------------------|--|
| N9071EM0E-1FP | Node-locked perpetual | R-Y5C-001-A ² | R-Y6C-001-L ² |
| N9071EM0E-1FL | Node-locked 12-month | R-Y4C-001-L ¹ | Included |
| N9071EM0E-1TP | Transportable perpetual | R-Y5C-004-D ² | R-Y6C-004-L ² |
| N9071EM0E-1TL | Transportable 12-month | R-Y4C-004-L ¹ | Included |
| N9071EM0E-1NP | Floating perpetual | R-Y5C-002-B ² | R-Y6C-002-L ² |
| N9071EM0E-1NL | Floating 12-month | R-Y4C-002-L ¹ | Included |
| N9071EM0E-1UP | USB portable perpetual | R-Y5C-005-E ² | R-Y6C-005-L ² |
| N9071EM0E-1UL | USB portable 12-month | R-Y4C-005-L ¹ | Included |


One month software support subscription extensions³

| Model | Description |
|------------------------|--|
| R-Y6C-501 ³ | 1-month of software support subscription for node-locked license |
| R-Y6C-502 ³ | 1-month of software support subscription for floating license |
| R-Y6C-504 ³ | 1-month of software support subscription for transportable license |
| R-Y6C-505 ³ | 1-month of software support subscription for USB portable license |

1. All time-based X-Series measurement application licenses includes a 12-month support contract which also includes the 12-month software support subscription as same duration.
2. Support contract must bundle software support subscription for all perpetual licenses in the first year. All software upgrades and Keysight support are provided for software licenses with valid support subscription.
3. After the first year, software support subscription may be extended with annual or monthly software support subscription extension.

You Can Upgrade!

All of our X-Series application options are license-key upgradeable.



Try Before You Buy!

Evaluate a full-featured version of our X-Series measurement application with our **FREE** trial. Redeem one 30-day trial license of each measurement application online at: www.keysight.com/find/X-Series_apps_trial

Hardware Configurations

To learn more about compatible platforms and required configurations, please visit: www.keysight.com/find/X-Series_apps_platform

Software Models & Options

To learn more about X-Series measurement application licensing, model numbers and options, please visit: www.keysight.com/find/X-Series_apps_model

Hardware Configuration

For optimizing the GSM/EDGE/Evo measurement application, Keysight recommends a minimum level of instrument hardware functionality at each instrument performance point. Supported instruments include:

Benchtop:

- UXA N9040A
- PXA N9030A
- MXA N9020A
- EXA N9010A
- CXA N9000A

PXIe:

- VSA (6 GHz) M9391A
- VSA (50 GHz) M9393A

N90x0B X-Series signal analyzer

| Capability | Instrument Option | Benefit |
|---------------------------------|-----------------------------------|---|
| Analysis bandwidth | 10 or 25 MHz as default or higher | Required: Wider analysis bandwidth options such as 25/40/85/125/160/255/510 MHz or 1 GHz can be selected depending on the specified signal analyzer model |
| Precision frequency reference | -PFR | Recommended: For enhanced frequency accuracy and repeatability for lower measurement uncertainty |
| Electronic attenuator | -EA3 | Recommended: Fast and reliable attenuation changes ideal for manufacturing without the wear associated with mechanical attenuators up to 3.6 GHz in 1 dB steps |
| Pre-amplifier | 3.6 GHz (-P03) or higher | Recommended: For maximizing the measurement sensitivity |
| Fine resolution step attenuator | -FSA | Recommended: Useful for maximizing useable dynamic range to see signals |
| Analog baseband I/Q inputs | -BBA on PXA and MXA only | Optional: To extend measurements at baseband if required by device under test |

M9391/93A PXIe VSA vector signal analyzer

| Description | Model-Option | Additional information |
|--|-------------------------------|--------------------------------|
| Frequency range 3 or 6 GHz | M9391A-F03, or F06 | One required for M9391A |
| Frequency range 8.4, 14, 18, or 27 GHz | M9393A-F08, F14, F18, or F27 | One required for M9393A |
| Frequency extension to 43.5 or 50 GHz | M9393A-FRZ or FRX | Optional (requires M9393A-F27) |
| Analysis bandwidth 40, 100 or 160 MHz | M9391A/M9393A-B04, B10 or B16 | One required |
| Memory 128, 512 or 1024 MSa | M9391A/M9393A-M01, M05 or M10 | One required |
| Frequency reference 10 MHz and 100 MHz | M9391A/M9393A-300 | One required |

Related Literature

Understanding GSM/EDGE Transmitter and Receiver Measurements for Base Transceiver Stations and their Components, Application Note, literature number 5968-2320E

Measuring EDGE Signals – New and Modified Techniques and Measurement Requirements, Application Note 1361, literature number 5980-2508EN

Web

Product page:

www.keysight.com/find/N9071E

X-Series measurement applications:

www.keysight.com/find/X-Series_Apps

X-Series signal analyzers:

www.keysight.com/find/X-Series


Application pages:

www.keysight.com/find/cellular

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

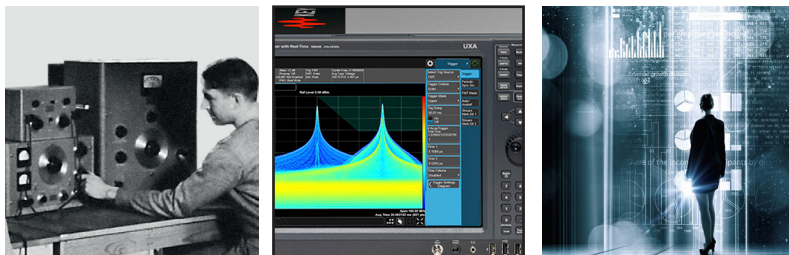

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

| | |
|---------------|------------------|
| Canada | (877) 894 4414 |
| Brazil | 55 11 3351 7010 |
| Mexico | 001 800 254 2440 |
| United States | (800) 829 4444 |

Asia Pacific

| | |
|--------------------|----------------|
| Australia | 1 800 629 485 |
| China | 800 810 0189 |
| Hong Kong | 800 938 693 |
| India | 1 800 11 2626 |
| Japan | 0120 (421) 345 |
| Korea | 080 769 0800 |
| Malaysia | 1 800 888 848 |
| Singapore | 1 800 375 8100 |
| Taiwan | 0800 047 866 |
| Other AP Countries | (65) 6375 8100 |

Europe & Middle East

| | |
|----------------|---------------|
| Austria | 0800 001122 |
| Belgium | 0800 58580 |
| Finland | 0800 523252 |
| France | 0805 980333 |
| Germany | 0800 6270999 |
| Ireland | 1800 832700 |
| Israel | 1 809 343051 |
| Italy | 800 599100 |
| Luxembourg | +32 800 58580 |
| Netherlands | 0800 0233200 |
| Russia | 8800 5009286 |
| Spain | 800 000154 |
| Sweden | 0200 882255 |
| Switzerland | 0800 805353 |
| | Opt. 1 (DE) |
| | Opt. 2 (FR) |
| | Opt. 3 (IT) |
| United Kingdom | 0800 0260637 |

For other unlisted countries:
www.keysight.com/find/contactus
 (BP-9-7-17)

DEKRA Certified
ISO 9001 Quality Management System

www.keysight.com/go/quality
 Keysight Technologies, Inc.
 DEKRA Certified ISO 9001:2015
 Quality Management System

This information is subject to change without notice.
 © Keysight Technologies, 2017 - 2018
 Published in USA, April 24, 2018
 5992-2851 EN
www.keysight.com

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

http://www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.



Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/x-series_apps

www.keysight.com/find/n9071e

