



A pair of 1.0 mm female connector launch assemblies. Left: 1.0 mm female connector end Right: Package end with 0.162 mm diameter pin



Flexible micro-circuit packaging

The Keysight Technologies, Inc. 11923A 1.0 mm female-connector launch threads into a package or fixture housing to transition a microwave circuit from microstrip to coaxial connector. The 11923A connector launch is intended for use with 8510XF and other test systems up to 110 GHz. The 11923A 1.0 mm female connector has an air dielectric interface and center conductor that is supported by a low-loss plastic bead on one end, and a glass-to-metal seal interface on the other end. This interface consists of a 0.162 mm diameter pin that extends inside the package or fixture for connection onto a microwave circuit.

The Keysight 11923A is preassembled and supplied with a machining detail for mounting the launch and assembly instructions (see Figure 1). The user is responsible for making the connection onto the circuit card, machining the package, and installing the connector. If a quasi-hermetic seal is desired, epoxy may be applied to threads of the launch prior to installation. The procedure describing the necessary dimensions for the package and installation is provided with the launch assembly.

Specifications

Specifications describe the instrument's warranted performance over the temperature range 0° to 55° C (except where noted).

Supplemental characteristics are intended to provide information for applying the instrument by giving typical but nonwarranted performance parameters. These are noted as "typical," "nominal," or "approximate."

1.0 mm (f) connector launch

Model number	Coax connector type	Frequency (GHz)	Insertion loss better than:
11923A	(f) to circuit card launch	dc –110	–1.0 dB
Supplemental chara	acteristics		
Model number	Return loss better than:	Max CW power	
11923A	–16 dB	6W	
Environmental spec	ifications		
	Operating	Non-operating	
Temperature Altitude	0° to 55° C <15.000 meters	–40° to 75° C <15.000 meters	3

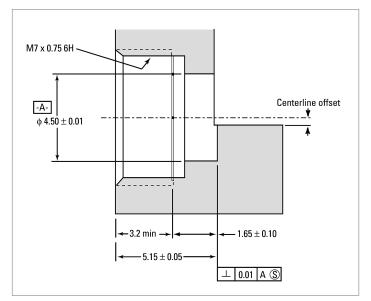


Figure 1. Section view of machining detail for mounting the launch

Note: The operating temperature is a critical factor in the performance during measurements and between calibrations. Storage or operation within an environment other than that specified above may cause damage to the product.

(≈50.000 feet)

Non-operating environmental specifications apply to storage and shipment. Products should be stored in a clean, dry environment. Operating environmental specifications apply when the product is in use. Products should not be operated in a condensing environment.


(≈50.000 feet)

RF & Microwave Test Accessories Web site: www.keysight.com/find/accessories

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology. From Hewlett-Packard to Agilent to Keysight.







myKeysight

myKeysight

www.keysight.com/find/mykeysight A personalized view into the information most relevant to you.

www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES Accelerate Technology Adoption. Lower costs.

Keysight Services www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings-onestop calibration, repair, asset management, technology refresh, consulting, training and more-helps you improve product quality and lower costs.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

(877) 894 4414 Canada Brazil 55 11 3351 7010 001 800 254 2440 Mexico United States (800) 829 4444

Asia Pacific

Australia 1 800 629 485 800 810 0189 China Hong Kong 800 938 693 India 1 800 11 2626 0120 (421) 345 Japan Korea 080 769 0800 1 800 888 848 Malaysia Singapore 1 800 375 8100 0800 047 866 Taiwan Other AP Countries (65) 6375 8100

Europe & Middle East

Austria	0800 001122	
Belgium	0800 58580	
Finland	0800 523252	
France	0805 980333	
Germany	0800 6270999	
Ireland	1800 832700	
Israel	1 809 343051	
Italy	800 599100	
Luxembourg	+32 800 58580	
Netherlands	0800 0233200	
Russia	8800 5009286	
Spain	800 000154	
Sweden	0200 882255	
Switzerland	0800 805353	
	Opt. 1 (DE)	
	Opt. 2 (FR)	
	Opt. 3 (IT)	

United Kingdom

For other unlisted countries:

0800 0260637

www.keysight.com/find/contactus (BP-9-7-17)



www.keysight.com/go/quality Keysight Technologies, Inc. DEKRA Certified ISO 9001:2015 Quality Management System

This information is subject to change without notice. © Keysight Technologies, 2017 Published in USA, December 1, 2017 5968-4315E www.keysight.com

