

## PQube® 3v Power Analyzer



### Features

- Installs easily with an ultra-compact footprint
- Connects directly to voltages up to 690 V
- Certified for Class A power quality according to IEC 61000-4-30 Ed3
- Monitors DC power and process parameters with four additional AC/DC analog channels
- Detects and records high-frequency impulses at 4 MHz
- Measures in real time and records 2 kHz ~ 150 kHz emissions
- Auto-detects the mains frequency, wiring configuration and nominal voltage
- Holds years of data and thousands of events via 32 GB of internal flash memory

### Overview


This compact instrument is simply the best voltage monitor and real-time sensor you can buy.

When voltage quality compliance is required – that’s when you need the PQube 3v.

Great for monitoring at the point of common coupling (PCC), as well as diagnosing equipment malfunction.

Easy to install, easy to use. Delivers ultra-precise results immediately to your inbox.

### Results

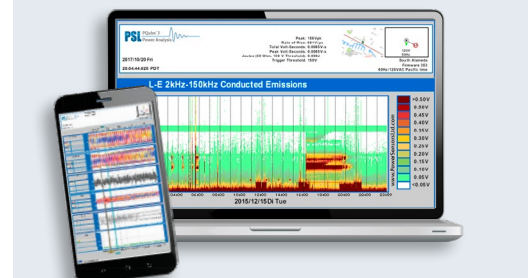

- **Real-time readings via protocols:**  
Modbus and SNMP
- **Events recordings and graphs:**  
CSV, GIF, and PQDIF
- **Daily, weekly, monthly trends and graphs:**  
CSV, GIF, and PQDIF

# Specifications

Part Number: PQube3-PQ-0000-0000-XXXX

## PQUBE 3v MEASUREMENT FUNCTIONS

Sampling rate	512 samples per cycle at 50 Hz / 60 Hz (applies to voltage, and analog channels)
<b>VOLTAGE (4 inputs, referenced to earth)</b>	L1, L2, L3, N, E   Range: 0 ~ 750 VAC (L-N), 0 ~ 1300 VAC (L-L), impedance: 4.8MΩ
Voltage Magnitude*	L-L, L-N, L-E, and N-E. RMS refreshed 1/2 cycle (URMS 1/2)
Frequency*	50 Hz, 60 Hz, 400 Hz, or 16.67 Hz
Unbalance (negative and zero sequence)*	IEC, GB, and ANSI methods
Flicker (Pinst, Pst, and Plt)*	IEC 61000-4-15v
Voltage Harmonic & Interharmonic*	Volt or %H1, IEC 61000-4-7 Class 1, order up to 50 <sup>th</sup>
Total Harmonic Distortion (THD)	%
High Frequency Impulse (voltage)	Records HF impulses on one channel (L1-E, L2-E, L3-E, or N-E) at 4 MHz sampling, or all four channels at 1 MHz, range: ± 6 kV
Conducted Emissions (2 - 9 kHz)*	Volts for L1-E, L2-E, L3-E; resolution 200 Hz bins, range 0 ~ 60 Vpk
(8 - 150 kHz)*	Volts for L1-E, L2-E, L3-E, and N-E; resolution 2000 Hz bins, range 0 ~ 60 Vpk

<b>ANALOG (4 single ended or 2 differential inputs)</b>	A1, A2, A3, A4, E   Range: Low: ± 10 VDC, High: ± 100 VDC
Analog Magnitude	(AN1-E, AN2-E, AN3-E, AN4-E) or differential (AN1-AN2, AN3-AN4) RMS refreshed 1/2 cycle
Power & Energy configuration (optional)	Power and energy meter 1 (AN1 X AN2), power and energy meter 2 (AN3 X AN4)

<b>DIGITAL (1 differential input)</b>	D+, D-   Digital threshold 1.5 V ± 0.2 V typical
---------------------------------------	--

<b>ENVIRONMENT (2 ENV2 probe inputs)</b>	USB2, USB3   Uses Powerside's ENV2 EnviroSensor probe
Temperature	-20 ~ +80 °C (-4 ~ 176 °F)
Humidity	0 ~ 100 % RH
Barometric Pressure	(Resolution better than 0.001 hPa)
Acceleration (x, y, and z)	± 2g, ± 4g, or ± 8g gravity ranges, trigger on shock/vibration, seismic, or tilt

<b>RELAY (triggered)</b>	Activated on sag/swell, over/under frequency, waveshape change, HF Impulse, snapshot, and digital/analog events
--------------------------	---

<b>RELAY (1 output)</b>	RLY1   30 V AC or DC, 300mA max, activates for event duration or 3 seconds (whichever is longer), 20 ms delay
-------------------------	---

## PQUBE 3v TECHNICAL SPECIFICATIONS

Dimensions (L x W x H)	4.33 in X 2.89 in X 3.08 in (metric: 11.0 cm X 7.34 cm X 7.82 cm), 35 mm DIN rail mountable
Weight	10.5 oz (300 g)
Operating Environment (temp., hum., alt.)	-20 ~ 65 °C (55 °C with PM2 AUX load), 5 ~ 95% RH (inside use), <2000 m above sea level (for EMC immunity, overvoltage, and other conditions, see full specs)
Power Supply (AC)	24 VAC ±10% at 50/60/400 Hz, 1.5A max (PSL's PM1 and PM2 modules supply PQube 3 compatible power at 100~240 VAC 50/60 Hz, and 120~370 VDC)
(DC)	±24 ~ 48 VDC ±10% (polarity independent), 1A max. Power over Ethernet (PoE) compatible
Internal memory	32 GB (holds over a year of data)***
Data backup	16 GB (up to 128GB) micro SD card or USB 2.0 thumb drive
Clock Synchronization	SNTP, NTP, and (optional) GPS
Output file types	GIF, text, CSV/Excel, and IEEE 1159-3 standard PQDIF
Communication	10/100 Ethernet port (RJ-45) (optional wireless and cell modem)
Communication ports	Modbus/TCP, DNP 3.0, SNMP with traps, FTP or HTTP (secure FTPS and HTTPS), and email

\* Meets or exceeds IEC 61000-4-30 Ed. 3 Class A



### Contact us

info@powerside.com  
powerside.com



#### Canada

7850 Trans-Canada Highway  
Saint-Laurent (QC) H4T 1A5  
1 (877) 333-8392

#### United States

980 Atlantic Ave  
Alameda (CA) 94501  
1 (888) 736-4347